



MonkeyLabs
Creative Connected Gadgets

Smart Home Automator



Proudly Made in INDIA

www.monkeylabs.in

4 Switch 3Way SMART Switch Module



Convert your existing switchboard



To a smart switchboard

CONVERT 4 CONVENTIONAL SWITCHES TO SMART

MONITOR STATUS OF SWITCH WITH SMARTSENSE



OPERATE THE SWITCHES NOW 3WAY



Manual Switch



Alexa Voice



Smartphone App

(1 0 0 % R E D U N D A N T B A C K U P)

info@monkeylabs.in :: WhatsApp +91 8919533848 :: Partner : +91 9999999999

4 Switch 3 Way Switch Module

Specifications

Product	4 Switch 3 Way Smart Switch Module	Country of Origin : INDIA
Code	SSwitchnnnnnn	
Model #	MLSSw4P3W	
Voltage Rating	220V AC 50 Hz	
Rated Current	6 Amps per Switch(pole)	
Connect	Phase In Neutral Direct to Load	
Appliance Power (0 Load)		
Wiring Type	2 mm Bunched per Switch free wire	
Alexa model	Echo Dot 3	
Mobile App	Pitaraa Home Automator	
Wi-Fi	2.4 Ghz Home Wi-Fi Router	
Packaging	Heat shrink PVC Fire proof BLACK	
Dimensions	L . W . H : 7 x 5.5 x 2.5 C M	
Home Automator SmartApp	Find & Configure * Rooms * Groups * Voice Control * Play Store * OTA * Secure	


Configuration Steps

1. Make Note of "Serial No."
2. Connect Unit to Ac Mains
3. Connect BULB to SWITCH #1
4. Turn On AC Mains to Unit
5. See Red led Glowing
6. See Blue LED Blinking
7. Blue Led Steady Glow (no Blink)
8. On Smart Phone Start App
9. Connect Smart Phone to Home Wi-Fi
10. Go to Settings in App
11. Add Switches (Wait for Secure connection)
12. Enter Yor Home Wi-Fi "Password"
13. Click " CONFIRM"
14. Select Smart Switch or "FIND SWITCHES"
15. Select Switch with "Serial No."
16. Enter all 5 Names
17. Click "CONNECT"
18. Wait for Blue led to Toggle
19. Wait for Switch One load to link
20. ONLY THEN
21. Select "OK"
22. Wait till App get back to Menu
23. Go to Man Menu
24. Select Switches
25. Check Phone Wi-Fi is connected
26. Operate Switches

MonkeyLabs
Creative Connected Gadgets

Smart Retro-Switch Wiring Diagram

Yellow wire – Top- Normally OFF
Blue wire –Center-sensor & load
Purple wire –Bottom-Normally ON

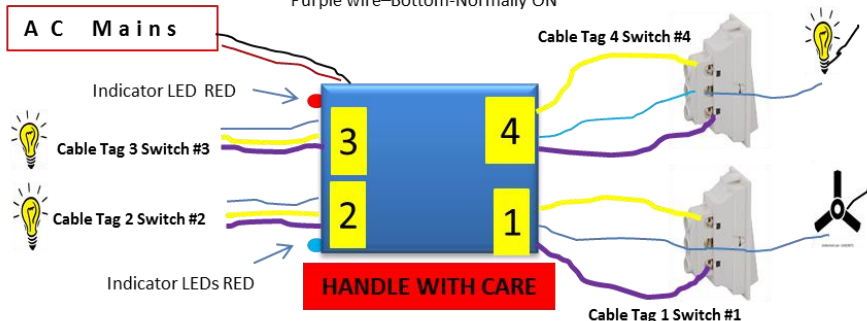

Regional Partner : My Partner(+919999999999)



Powered by
TINGSS™

